



RVSCOMCAB1-X

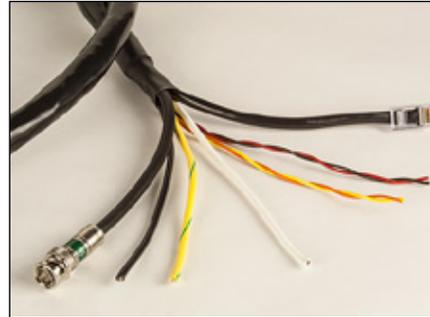

RVS Dome Mating Cable  
PN 342383

RVS Dome Pigtail Cable  
PN 342389

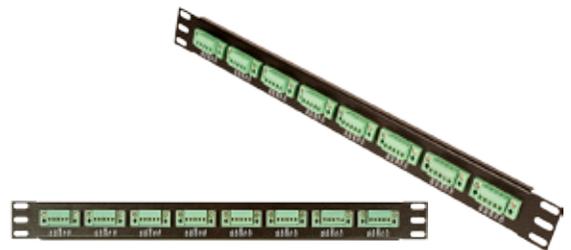

Rack Mount Data Connection Panel  
RVSDP-8


## Camera Composite Cable, Analog RVSCOMCAB1-X\*

Construction	13 conductors with PVC overall jacket. Conductors include: (1) RG59 Coax Cable, Belden 1426A (1) 16 AWG Pair (1) 14 AWG Pair (2) 22 AWG Shielded Pairs (2) 22 AWG Pairs
Wiring Diagram: 14 Pin Circular Connector	
1	Black, 16 AWG, 24VAC Dome Power
2	White, 16 AWG, 24VAC Dome Power
3	Orange, 22 AWG, Data Receive -
4	Yellow, 22 AWG, Data Receive +
5	Brown, 22 AWG, Data Transmit +
6	Red, 22 AWG, Data Transmit -
7	Brown, 14 AWG, 24VAC Heater/Blower Power
8	Red, 14 AWG, 24VAC Heater/Blower Power
9	Green, 22 AWG, Alarm 1 Input
10	Blue, 22 AWG, Alarm 2 Input
11	Coax Center, Video
12	Black, 22 AWG, Coax Shield
13	Violet, 22 AWG, Ground
14	Gray, 22 AWG, Alarm Common
Environment	Indoor / Outdoor
Weight	Approximately 20 lb per 100 ft

## Camera Composite Cable, Hybrid Analog/IP RVSCOMCABH1-X\* (see diagram below)

Construction	16 conductors with PVC overall jacket. Conductors include: (1) RG59 Coax Cable, Belden 1426A (Analog video) (3) 14 AWG Stranded (Power) (2) 22 AWG Shielded Pairs (8) 24 AWG 4 Pair Solid Copper (CAT 5E Rated)
Wiring Diagram: 14 Pin Circular Connector	
1	Black, 14 AWG, 24VAC Dome Power
2	White, 14 AWG, 24VAC Dome Power
3	Orange, 22 AWG, Data Receive -
4	Yellow, 22 AWG, Data Receive +
5	Brown, 22 AWG, Data Transmit +
6	Red, 22 AWG, Data Transmit -
11	Coax Center, Video
12	Coax Shield, Video
13	Yellow/Green, 14 AWG, Ground
Environment	Indoor / Outdoor
Weight	Approximately 20 lb per 100 ft

\* X = Length in feet

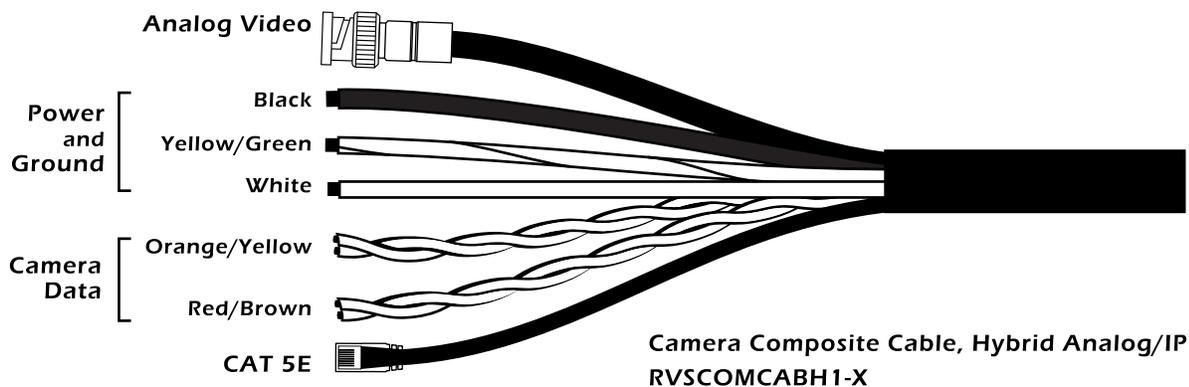

## Dome Mating Cable PN 342383 (Female Pins)

Construction	14 pin AMP circular connector. 13 conductors. Conductors include: (11) 18 AWG Teflon coated stranded wire (1) Coax Cable, 75 Ohm Belden 8218
Dimensions	Wire length = 18" Coax cable length = 8"
Environment	Indoor / Outdoor

## Dome Pigtail Cable PN 342389 (Male Pins)

Construction	14 pin AMP circular connector. 6 conductors. Conductors include: (4) 18 AWG Teflon coated stranded wire (1) Coax Cable, 75 Ohm Belden 8218 Stainless steel strain relief
Dimensions	Wire length = 8" Coax cable length = 8"
Environment	Indoor / Outdoor

Available as separate cable or factory installed on the dome.